

Impact-R 3120




Features

The Impact-R 3120 series 3U computers are powered by Intel® based motherboards, delivering a compact and flexible computer platform.

Key features:

- Intel® 12th, 13th, 14th Generation CPU architecture
- DDR5 Memory up to 192GB
- Supports 4 native displays simultaneously

Dimensions

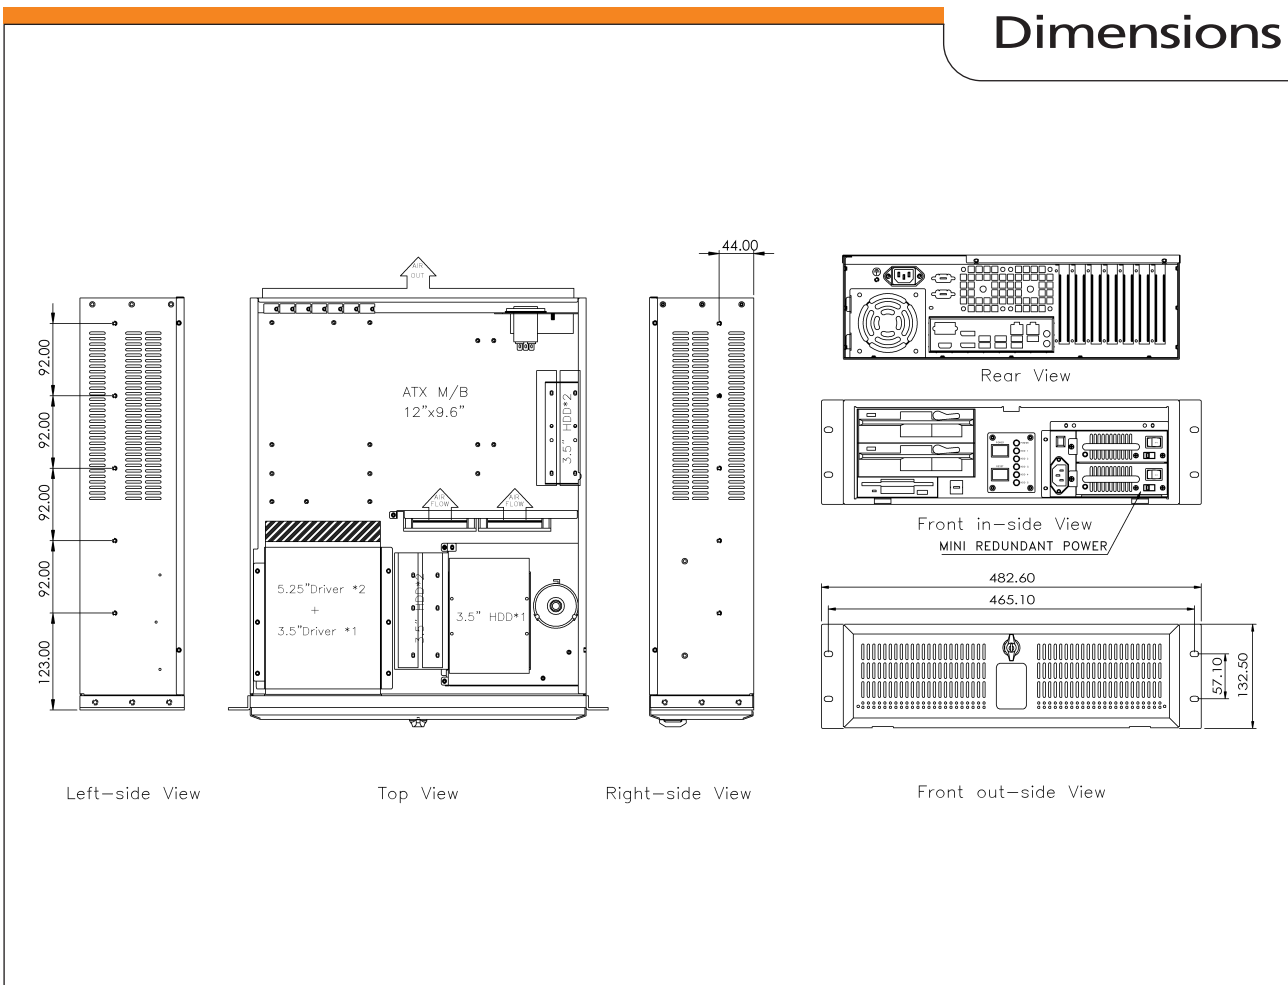

Impact-R 3120

The information is believed to be accurate. However Amplicon Liveline Limited accepts no responsibility for any problems caused by errors and omissions. Specifications are subject to change without notice.

Specifications

Hardware Specification	<p>CPU: Intel® LGA1700 12th Generation Core™ i9/i7/i5 Chipset: Intel® Q670E</p> <p>Memory: Four 288-pin UDIMM up to 192GB (Non-ECC) Dual Channel DDR5 up to 4400 MHz</p> <p>LAN: 1 x Intel® I226-LM (Core i9/i7/i5 support iAMT) 1 x Intel® I226-V</p>	Optional Breakout Interfaces (Will use 1 slot per breakout)	<p>2 x RS-232/422/485 4 x RS-232 2 x USB 3.2 Gen 1 1 x USB 2.0 Type A 2 x USB 2.0 (Header 2x) 1 x Front Audio Header 1 x S/PDIF 1 x PS/2 (2.54mm pitch) 4-IN / 8-OUT DIO 1 x eSPI 1 x SMBus</p>
BIOS	<p>AMI SPI 256Mbit</p>	System Architecture	<p>Intel® Based Industrial motherboard</p>
Display	<p>1 x VGA, resolution up to 1920x1200 @ 60Hz 2 x DP++, resolution up to 4096x2304 @ 60Hz 1 x HDMI 2.0a, resolution up to 4096x2160 @ 24Hz</p>	Supported O/S	<p>Windows 10 IoT Enterprise 64-bit Windows 11 LTSC Linux</p>
Storage	<p>Total Drive capacity: 2 x 5.25", 1 x 3.5" external, 4 x 3.5" internal</p> <p>4 x SATA 3.0 (up to 6Gb/s) RAID 0/1/5/10</p>	Mechanical	<p>Design: EIA RS-310C 19" Rackmount Standard Construction: 1.2mm SECC Zinc-Coated Steel Security: Lockable front door Color: Black (custom colours available for large orders) Dimensions: 483(W) x 133(H) x 526(D)mm (19.0" x 5.2" x 20.7") Packaging Size: 588(W) x 285(H) x 703(D)mm (23.1" x 11.2" x 27.7") Total drive capacity: 2 x 5.25", 1 x 3.5" external, 4 x 3.5" internal Cooling: 1 x 80mm, 2 x 92mm ball bearing fan Air filter: removable (washable) Gross weight: approximately 18 kg</p>
System Expansion	<p>2 x PCIe x16 (Gen 4, 16 or 8+8) —Support PCIe1/PCIE4 : single at x16(PCIE1) —Support PCIe1/PCIE4 : dual at x8(PCIE1)/x8(PCIE4) —Support PCIe1 : Riser card x16 or x8/x8 selected by BOM change</p> <p>3 x PCIe x4 (Gen 4, open edge)</p> <p>1 x PCIe x4 (Gen 3, open edge, opt. share M.2-M2, function selected by BIOS.)</p> <p>1 x PCI</p> <p>1 x M.2 2230 E key (PCIe/USB 2.0/Intel CNVi/Wifi 6E) 1 x M.2 2242/2260/2280 M key (PCIe x4 Gen4 NVMe, SATA) 1 x M.2 2242/2260/2280 M key (default, PCIe x4 Gen3 NVMe share PCIe#6, function selected by BIOS.)</p>	Environmental operation	<p>Acoustic noise: Approximately 49dB(A) sound pressure at 23°C (typical) Temperature: Operating: -5 to 65°C Humidity: Operating: 5 to 95% RH</p>
External Interfaces	<p>Front: 2 x USB 2.0/1.1 On/Off Switch, Reset Pwr/HDD LEDs</p> <p>Rear: 2 x 2.5GbE (RJ-45) 4 x USB 3.2 Gen 2 4 x USB 3.2 Gen 1 1 x VGA, 2 x DP++, 1 x HDMI 1 x Line-out, 1 x Mic-in</p>	Environmental storage	<p>Temperature: Storage: -20 to 70°C with RTC Battery; -40 to 85°C without RTC Battery Humidity: Storage: 5 to 95% RH</p>
		Reliability	<p>System MTBF: 208,538 hrs @ 25°C; 135,107 hrs @ 40°C; 76,715 hrs @ 60°C; 58,368 hrs @ 70°C Calculation Model: Telcordia Issue 2 Environment: GB, GC - Ground Benign, Controlled</p>
		Certifications	<p>CE, UKCA</p>